

---

# Queo™

# Together we can

---

Enabling innovation with plastomers  
and elastomers



**BOREALIS**

ب.ر.ج

**Borouge**



## Contents

04	Borealis worldwide
06	POP and POE Markets A unique Borealis offer – Together we can
07	About Queo™
08	Queo™ portfolio – Plastomers
11	Queo™ portfolio – Elastomers
13	Borceed™ technology
14	Queo™ grades



Together we can | Date of issue: May 2019

**About Borealis** Borealis is a leading provider of innovative solutions in the fields of polyolefins, base chemicals and fertilizers. With its head office in Vienna, Austria, the company currently has around 6,800 employees and operates in over 120 countries. Borealis generated EUR 8.3 billion in sales revenue and a net profit of EUR 906 million in 2018. Mubadala, through its holding company, owns 64% of the company, with the remaining 36% belonging to Austria-based OMV, an integrated, international oil and gas company. Borealis provides services and products to customers around the world in collaboration with Borouge, a joint venture with the Abu Dhabi National Oil Company (ADNOC).


Borealis and Borouge aim to proactively benefit society by taking on real societal challenges and offering real solutions. Both companies are committed to the principles of Responsible Care®, an initiative to improve safety performance within the chemical industry, and work to solve the world's water and sanitation challenges through product innovation and their Water for the World programme.

**For more information visit:** [www.borealisgroup.com](http://www.borealisgroup.com) · [www.borouge.com](http://www.borouge.com) · [www.waterfortheworld.net](http://www.waterfortheworld.net)

**Disclaimer** The information contained herein is to our knowledge accurate and reliable as of the date of publication. Borealis and Borouge extend no warranties and make no representations as to the accuracy or completeness of the information contained herein, and assume no responsibility regarding the consequences of its use or for any errors. It is the customer's responsibility to inspect and test our products in order to satisfy himself as to the suitability of the products for the customer's particular purpose. The customer is also responsible for the appropriate, safe and legal use, processing and handling of our products. Nothing herein shall constitute any warranty (express or implied, of merchantability, fitness for a particular purpose, compliance with performance indicators, conformity to samples or models, non-infringement or otherwise), nor is protection from any law or patent to be inferred. Insofar as products supplied by Borealis and Borouge are used in conjunction with third-party materials, it is the responsibility of the customer to obtain all necessary information relating to the third-party materials and ensure that Borealis and Borouge products, when used together with these materials, are suitable for the customer's particular purpose. No liability can be accepted in respect of the use of Borealis and Borouge products in conjunction with other materials. The information contained herein relates exclusively to our products when not used in conjunction with any third-party materials.

Borstar is a registered trademark of the Borealis Group. Queo, Borlink and Borceed are trademarks of the Borealis Group.

# Borealis worldwide

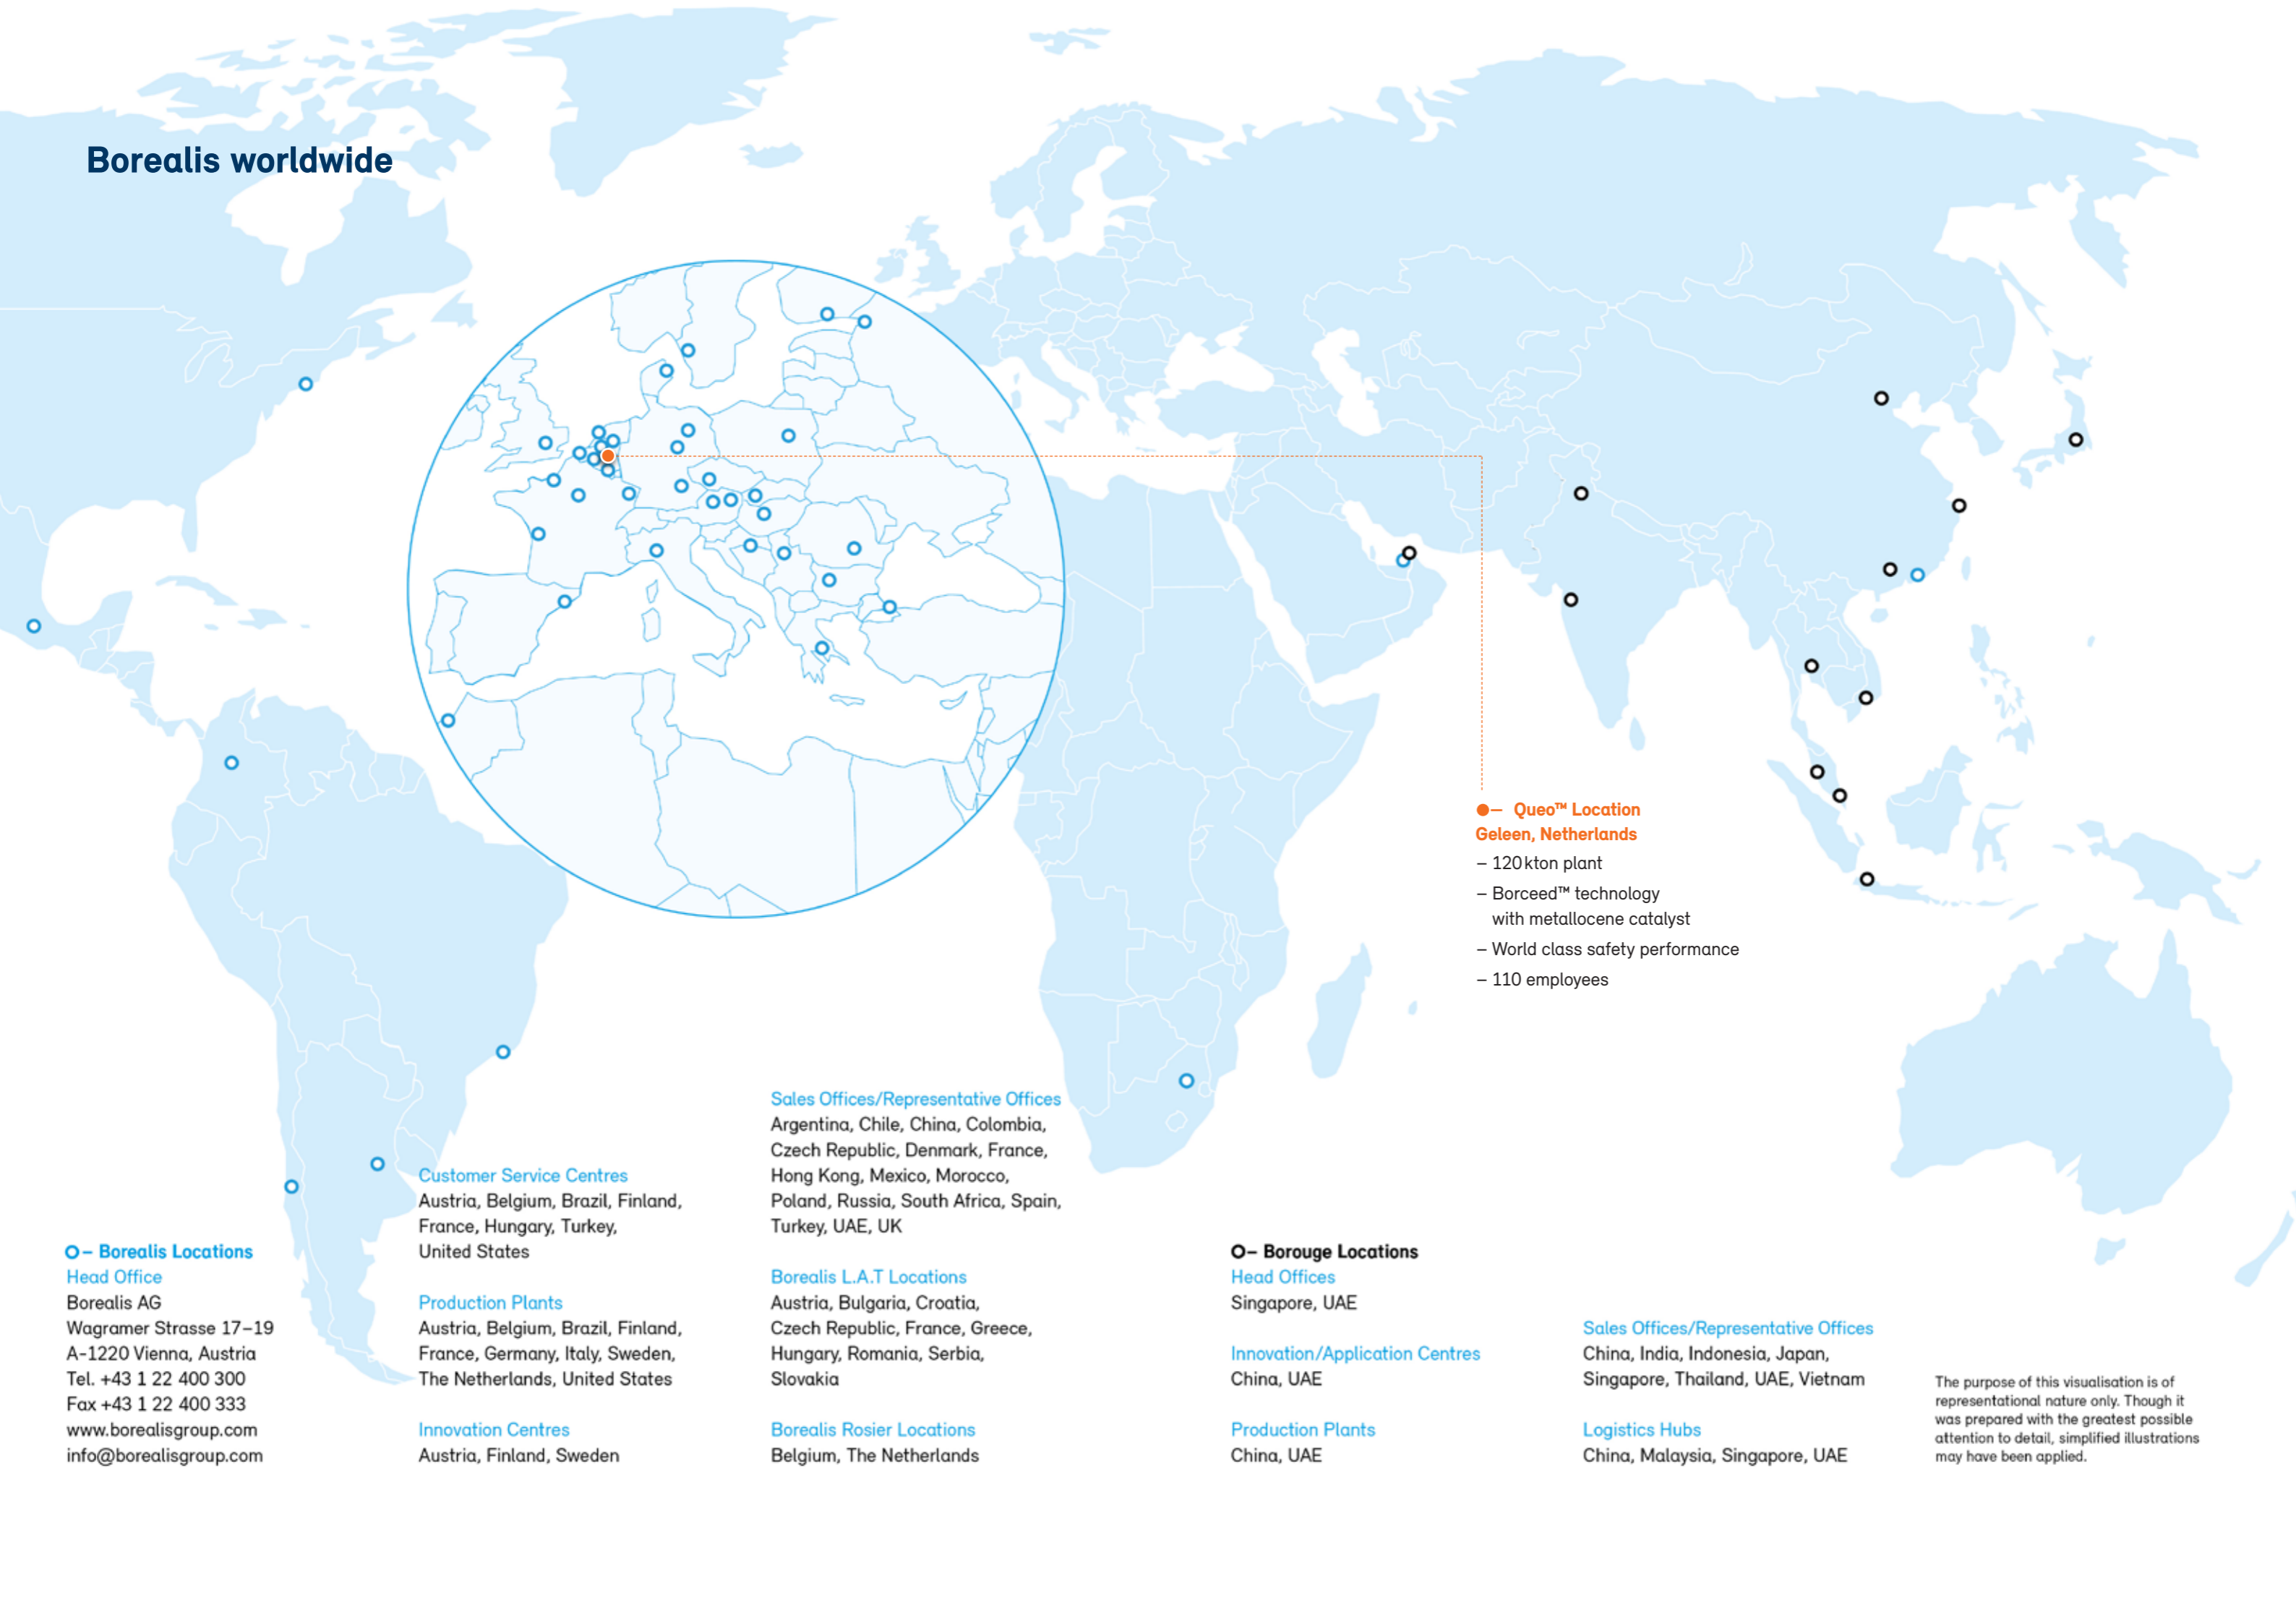

**○ – Borealis Locations**

**Head Office**  
 Borealis AG  
 Wagramer Strasse 17–19  
 A-1220 Vienna, Austria  
 Tel. +43 1 22 400 300  
 Fax +43 1 22 400 333  
 www.borealisgroup.com  
 info@borealisgroup.com

**Customer Service Centres**

Austria, Belgium, Brazil, Finland, France, Hungary, Turkey, United States

**Production Plants**

Austria, Belgium, Brazil, Finland, France, Germany, Italy, Sweden, The Netherlands, United States

**Innovation Centres**

Austria, Finland, Sweden

**Sales Offices/Representative Offices**

Argentina, Chile, China, Colombia, Czech Republic, Denmark, France, Hong Kong, Mexico, Morocco, Poland, Russia, South Africa, Spain, Turkey, UAE, UK

**Borealis L.A.T Locations**

Austria, Bulgaria, Croatia, Czech Republic, France, Greece, Hungary, Romania, Serbia, Slovakia

**Borealis Rosier Locations**

Belgium, The Netherlands

**○ – Borouge Locations**

**Head Offices**  
 Singapore, UAE

**Innovation/Application Centres**

China, UAE

**Production Plants**

China, UAE

**● – Queo™ Location**  
**Geleen, Netherlands**

- 120kton plant
- Borceed™ technology with metallocene catalyst
- World class safety performance
- 110 employees

**Sales Offices/Representative Offices**

China, India, Indonesia, Japan, Singapore, Thailand, UAE, Vietnam

**Logistics Hubs**

China, Malaysia, Singapore, UAE

The purpose of this visualisation is of representational nature only. Though it was prepared with the greatest possible attention to detail, simplified illustrations may have been applied.

## POP and POE Markets

Around the world, polyolefin plastomers (POP) and polyolefin elastomers (POE) markets are exhibiting robust growth. Demand continues to rise for polymer solutions that fulfil sophisticated sealing, flexibility, toughness, compatibility and processability requirements. The range of applications continues to expand, particularly in the areas of automotive thermoplastic olefins (TPOs), wire and cable, and consumer packaging. Increasingly, these innovative polymer solutions are replacing conventional polymers such as polyvinyl chloride (PVC), ethylene

propylene diene (EPDM), ethylene vinyl acetate (EVA), linear low density polyethylene (LLDPE) and thermoplastic vulcanizate (TPV).

Our Queo™ products encompass a range of low density ethylene copolymers made possible by combining metallocene catalyst technology with our solution polymerisation process. More efficient and consistent comonomer incorporation enables our products to offer the best of both worlds, combining the performance characteristics of elastomers with the processing advantages of a thermoplastic.

## A unique Borealis offer – Together we can

Borealis believes in Value Creation through Innovation and providing proven solutions. To this end we are working with our customers and partners to develop attractive polyolefin plastomer and elastomer solutions that fulfil demanding sealing, flexibility, toughness, compatibility and processing requirements.

### Leading innovator and reliable partner

Borealis is a leading innovator with a track record of over 50 years in the polyolefins industry. In plastomers, Borealis is a European market leader with more than 20 years of experience in producing high-quality polyolefin plastomers based on proprietary technology. Since 2014 Borealis Plastomers has been developing a portfolio of elastomers to complement the existing offer. These products have become available commercially in 2016.

### A team dedicated to customers

Borealis Plastomers has a dedicated team of around 100 employees based in Geleen, the Netherlands. Our clear customer focus allows us to serve customers with short response times, excellent service levels, security of supply, flexible planning and rapid delivery of innovative solutions tailored to customers' needs.

### Extensive technological knowledge

Borealis is a leading global provider of innovative polyolefin solutions with decades of experience. Building on its proprietary Borstar®, Borlink™ and Borceed™ technologies, Borealis is committed to advancing the properties and applications of polyolefins, with a strong focus on industries such as automotive, wire and cable, and high-end consumer packaging.

## About Queo™

Embedded in the Borealis Plastomers product family since March of 2013, Queo is a key brand in our ongoing drive to be a global provider of innovative solutions in polyolefins.

### Queo™ is closing the gap between thermoplastic products and rubbers




Queo plastomers and elastomers close the gap between classic thermoplastic products and rubbers, exhibiting

both plastomeric and elastomeric properties This is achieved through efficient and uniform incorporation of octene as comonomer and by using a specialised metallocene catalyst.

		Polyolefin Elastomers		Polyolefin Plastomers			
	ISO1183	860	870	880	890	900	910
Density (kg/cm <sup>3</sup> )	ISO1183	860	870	880	890	900	910
DSC Peak melting point (°C)	ISO11357	35	60	75	85	95	105
Flexural modulus (MPa)	ISO178	5	10	20	40	70	130

By incorporating increasing amounts of octene comonomers into the ethylene backbone structure, Borealis is able to supply Queo solutions that provide our customers with significant benefits:

- Reduced crystallinity
- Improved flexibility and low-temperature impact
- Decreased density
- Lower melting points

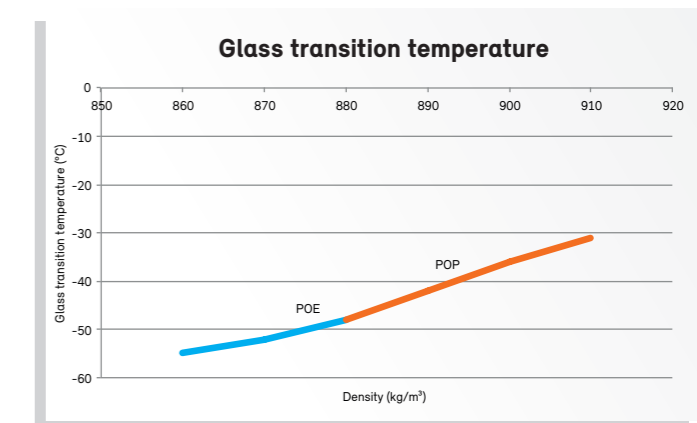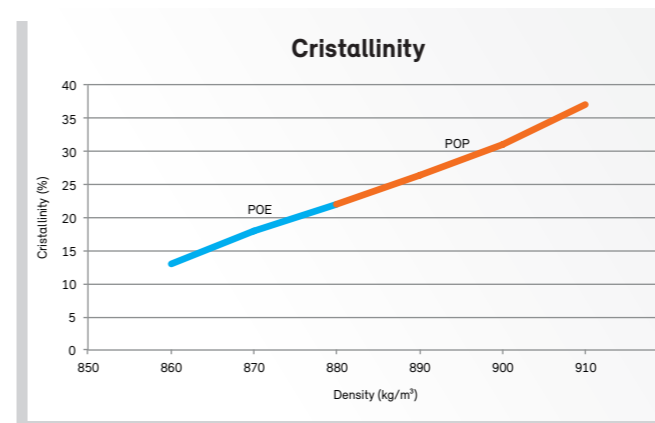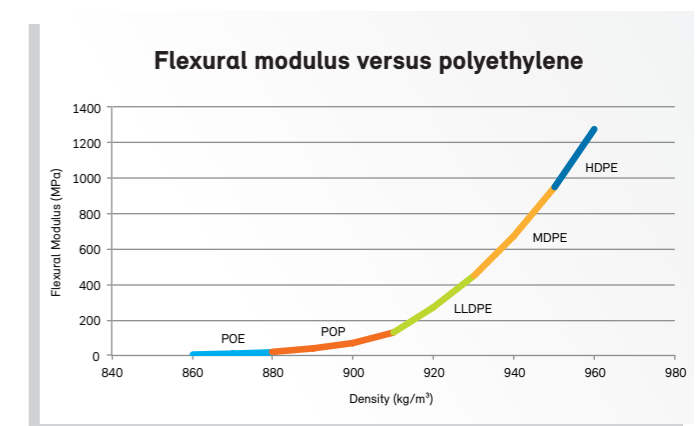

**Queo™ is multitalented**

Derived from the Latin “I can”, the name Queo™ symbolises the brand’s key strength as an enabler. Designed on the basis of our core competencies, Queo’s unique product

performance and balanced property profile offer new opportunities when it comes to enhancing an existing product range or expanding into new markets.



**Flexible:**

Queo™ has a highly amorphous structure, resulting in outstanding flexibility, good optical properties and very low temperature impact resistance.

**Tough:**

A narrow molecular weight distribution and uniform comonomer incorporation make Queo exceptionally tough.

**Competent:**

Queo offers best-in-class sealing performance with lower peak melting points, narrow melting ranges and excellent seal through contamination.

**Team player:**

Queo is highly compatible with other polyolefins, allowing tailor-made blends to meet specific requirements.

## Queo™ portfolio – Plastomers

**Portfolio**

The Borealis Queo™ polyolefin plastomers product family offers a unique combination of flexibility (20–100 MPA), high mechanical strength (tensile strength, tear and puncture resistance), state-of-the-art sealing performances (low seal initiation temperatures and seal through contamination), and high clarity.

Their properties make Queo™ plastomers suitable for a large variety of applications, including flexible and rigid specialty and high performance packaging, soft flexible mouldings, specialty compounds for a vast number of end uses like wires and cables, and automotive acoustics insulation.

**Application Highlights**



**Flexible packaging**

**Superior seal performance**

Queo plastomers provide a combination of low seal initiation temperature with high hot tack and seal strength over a broad temperature window, outperforming conventional sealing polymers such as metallocene linear low density (mLLDPE), very low density polyethylene (VLDPE), EVA and Ionomers. This translates into customer benefits such as increased line speed and reduced wastage.

As Queo’s superior sealing performance often exceeds actual packaging requirements, blending and downgauging are efficient measures to balance performance against cost. By blending with LDPE, extrudability improves, and downgauging above 20% has been demonstrated in a variety of applications.

Equally important to outstanding seal performance is the excellent seal through contamination offered by Queo plastomers for both powder and liquid contaminants. Here, Queo plastomers again outperform all conventional sealing materials and offer the customer reduced downtime on the packaging line as well as minimal wastage.

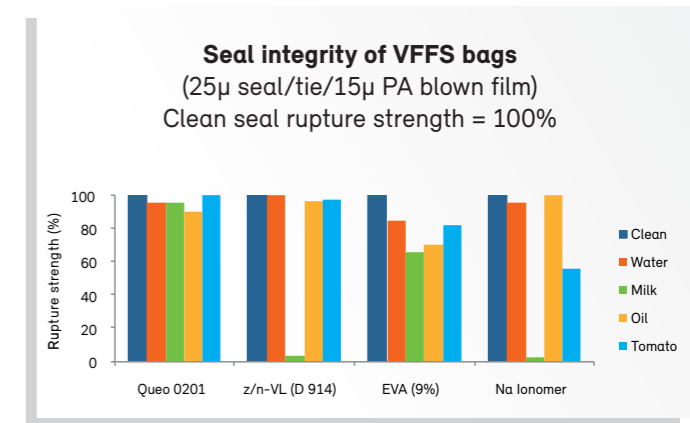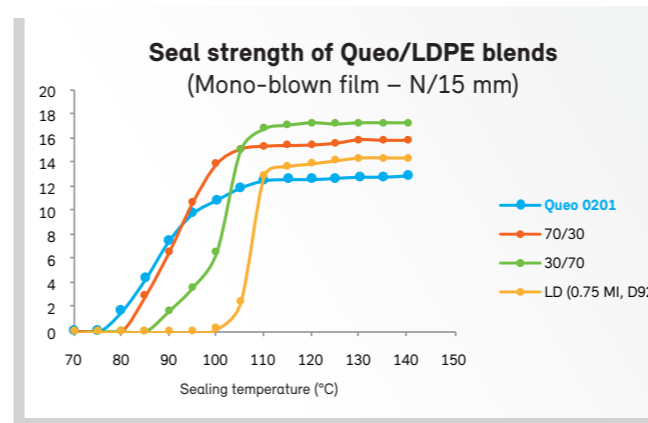

**Outstanding optical properties**

Queo plastomers can also contribute to enhanced packaging appearance and aesthetics. The low haze value of film produced with Queo can improve product visibility and facilitate outstanding graphics, thus contributing to easier product differentiation among consumers, e.g. in retail environments.


**Excellent purity**


Queo plastomers contain low levels of extractables, contributing to reduced die build-up and smoke

generation during processing on the one hand, and excellent organoleptics on the other.

**Exceptional toughness**

Driven by the improved mechanical properties of metallocene-based products, Queo plastomers exhibit top performance when it comes to overall toughness. For this reason, Queo plastomers are the material of choice for high-strength freezer films, meat packaging and pouches. Even in minority blends, the improvements are of such significance that cost-effective downgauging can still be achieved.


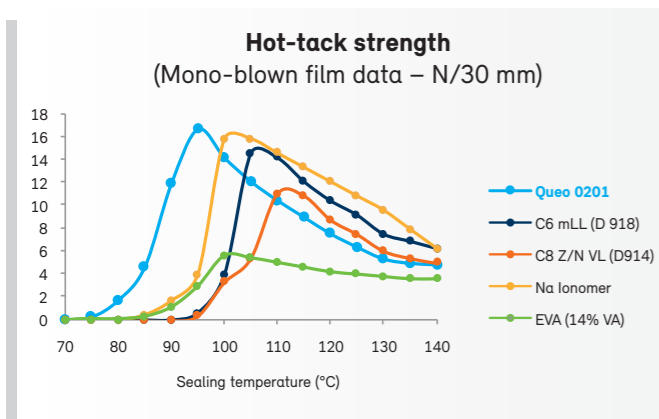


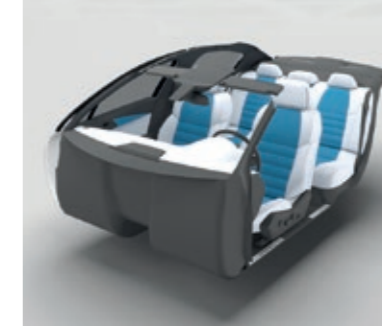

### Rigid packaging and housewares

The flexibility and exceptional mechanical properties of Queo plastomers are not only exploited in flexible packaging, but are also used in rigid packaging to improve low temperature impact resistance. When Queo is used as a blend partner with random PP copolymer, clarity and haze level can also be maintained. What is more, low flex

fatigue, excellent chemical resistance and organoleptics make Queo the material of choice when the aim is to improve performance of caps, closures and seals. Haptics, soft touch and aesthetics are additional arguments for using Queo in rigid packaging and housewares such as toys and cosmetics packaging.

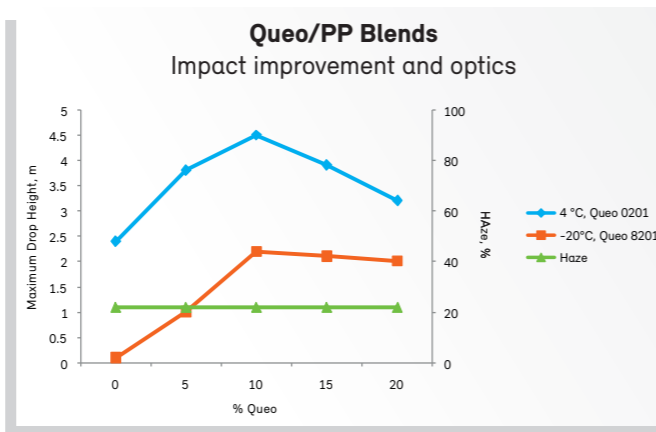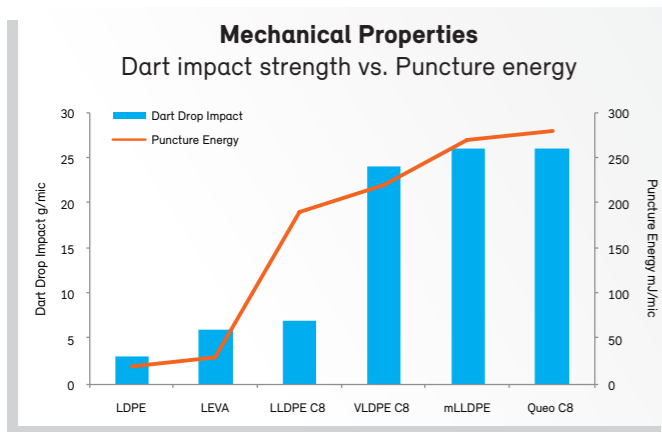

### Halogen Free Flame Retardant compounds

Queo plastomers are an ideal blend partner for thermoplastic HFFR formulations, because they have a high acceptance for flame-retardant fillers like magnesium and aluminium hydroxides. Supplied in free flowing pellets for continuous compounding, Queo plastomers can be processed on conventional plastics equipment at comparable line speeds.

HFFR compounds containing Queo plastomers have a low density, resulting in a combination of weight savings and lower costs per volume. Nevertheless, Queo plastomers ensure thermal and mechanical versatility, and provide a flexibility comparable to that of conventional PVC and EPDM.

Queo plastomers are cross-linkable by using Silane or Peroxide technology, and will outperform EVA on key mechanical characteristics in thermoplastic HFFR formulations. The flexibility and thermal performance (Hot Knife Test) of HFFR compounds can be influenced by selecting a specific Queo density and melt index.

### Sound deadening sheets

Queo plastomers are very suitable as the base polymer for automotive sound deadening sheets because they provide high flexibility and exceptional mechanical properties including puncture resistance, elongation at break, as well as tear and tensile strength.

Since they are easy to process and available in different Melt Flow Rate in the form of non-stick, free flowing pellets, Queo plastomers enable fast and continuous compounding. They can be processed in various ways such as calendar, flat die extrusion, injection moulding and others.

Queo plastomers can also be blended with PE for cost efficiency, or with high levels of recycled materials to reduce the carbon footprint of sound deadening sheets.

## Queo™ portfolio – Elastomers

### Portfolio

Whereas Queo™ polyolefin plastomers are mainly aimed at applications requiring good to moderate flexibility combined with higher thermal properties and high mechanical strengths, Queo™ polyolefin elastomers are targeted at applications for which very high flexibility (<20 MPa), lower melting points (55–75°C) and improved low temperature performance (glass transition -55°C) are key requirements.

The increased product performance of Queo™ polyolefin elastomers compared to polyolefin plastomers, makes these products the material of choice for application such as interior and exterior car parts, adhesives, cable compounds, grafted polymers and highly resilient surfaces.

Borealis is now launching a new Elastomer: 6201LA-P. Our current grade portfolio exists of Polyolefin Plastomer products, with density 870 to 910 kg/m<sup>3</sup>, the new Polyolefin Elastomer (POE) will help us open up new markets for 860 kg/m<sup>3</sup> applications in: Automotive and Construction TPO, EPDM profile and Cable manufacturing, EPDM / TPV replacement and grafting. Advantages of this new product are: outstanding low temperature impact, highly amorphous structure, excellent polymer modifier, processing on plastic & rubber equipment, high filler & oil acceptance, EPDM like flexibility, compatible with PE, PP and EPDM.

### Application Highlights

#### Thermoplastic Polyolefins

Queo elastomers are highly flexible and therefore very suitable to improve the impact performance of the semi-crystalline polyolefin – often PP – in thermoplastic polyolefins. Queo elastomers can be melt-blended with PP, for instance in a twin screw mixer, to create a TPO with the desired characteristics.


Queo elastomers fulfil the main requirements of low-temperature impact strength, lightweighting potential, mechanical strength, filler acceptance, good dispersion, low extractables migration and elasticity.

Queo™ metallocene based ethylene alpha olefin elastomers have some unique characteristics that make them ideal as impact modifiers for PP based TPOs. Their controlled, high comonomer incorporation results in low crystalline, highly

amorphous polymers. In addition, the glass transition temperature of Queo™ elastomers is around -55°C.

TPO applications:

- Interior and exterior car parts
- Appliances and housewares
- Furniture
- Recreational goods
- Crates and containers

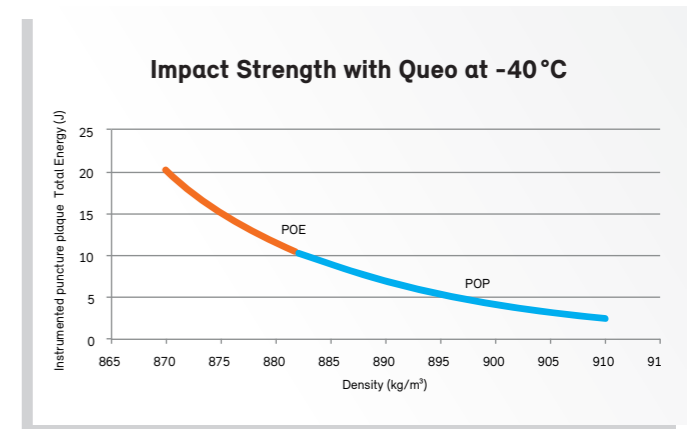

### Adhesives

An adhesive typically consists of several different components to create the required combination of mechanical, wetting, viscous and adhesive properties. Queo elastomers can easily be combined with these different components without affecting their performance.

Queo elastomers are very flexible with a low crystallinity and a have a sharp melting point for fast application. They also have a lower density which allows more adhesive to be made per unit of resin and provide the advantages of lower filter plugging.

On top of that, Queo elastomers are more resistant to oxidative degeneration, translating into better colour retention of the finished product, as well as more consistent sealing characteristics.

Adhesive applications:

- Glue
- Sticky tape
- Hygiene products
- Book binding

### Cable bedding compounds


A compound of roughly 80% calcium carbonate and 20% Queo elastomer is excellent for encasing the conductors in a cable and to make that cable round. At the same time, this compound also provides a protective layer between the cable core and the jacketing.

Queo elastomers are robust, have a high filler acceptance and exhibit improved filler dispersion. Furthermore, high flexibility and strong mechanical properties, including tear and tensile strength and elongation at break, make Queo elastomers very suitable for cable bedding compounds.

There are Queo elastomers with different Melt Flow Rate to facilitate the extrusion of specific cable types. Fast and continuous compounding is crucial in these processes, so Queo elastomers are ideal as they come in the form of free flowing pellets.

Other examples of elastomers applications:

- Grafted polymers
- High resilient flooring
- Industrial film

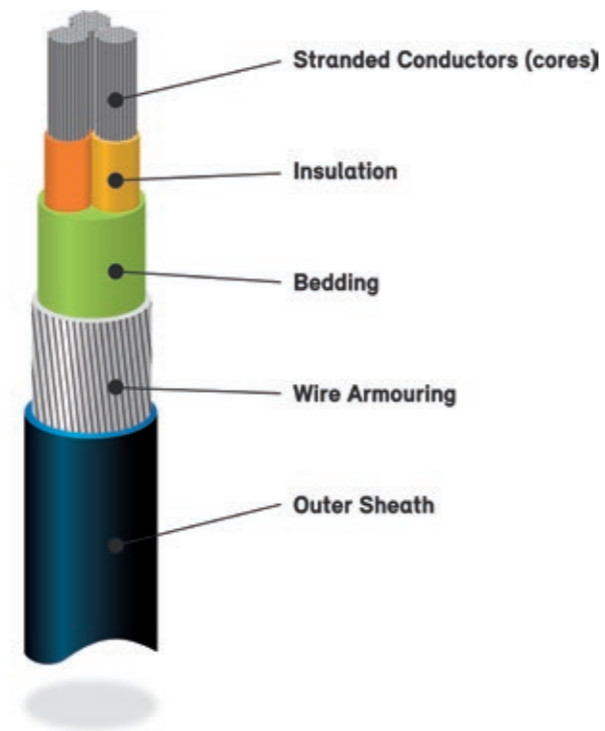

## Borceed™ technology

Queo™ products are based on Borceed, a proprietary Borealis technology that enables flexible materials that exhibit both plastic and elastomeric properties. The plastomers and elastomers made possible by Borceed are complementary to other Borealis proprietary technologies that target the similar markets and customers, such as Borstar® and Borlink™.

Queo polyolefin elastomers are made using a combination of Borceed solution polymerisation technology and a specialty metallocene catalyst, which allows higher amounts of octene comonomer to be integrated in the ethylene backbone structure. As a result, Queo copolymers have a lower density and are very flexible with outstanding low temperature impact performance.

The Borceed technology is a Borealis proprietary solution originally developed and marketed by DSM under the name Compact. When Borealis acquired the Dutch plastomers production site in Geleen from DSM and ExxonMobil Chemical, ownership of the Compact technology also transferred.

To complete the integration of Compact into the Borealis technology portfolio, it was given the new brand name Borceed. This name was chosen to represent the idea of proceeding towards new heights and exceeding expectations. Moving forward, Borealis is committed to developing and improving Borceed further, paving the way for further Queo plastomer and elastomer developments.



# Queo™ grades

Product Name	Grade	Density (kg/m <sup>3</sup> ) ISO 1183	MFR (dg/min) 2.16 kg/190°C ISO 1133	DSC Peak melt point (°C) ISO 11357	Film Applications	Extrusion coating	Sound deadening & other automotive	Flexible sheets	Wire and Cable	PP Impact modification	Injection molded articles	Compounds & masterbatches	Synthetic corks	Adhesives	Caps & closures	Foams	
<span>New</span> Queo	6201LA-P	862	1.0	35			•		•	•		•					– low Anti-Oxidant package – Talcum Dusted
Queo	6800LA	868	0.5	47	•		•	•	•	•							– low Anti-Oxidant package
Queo	7001LA	870	1	56	•		•	•	•	•							– low Anti-Oxidant package
Queo	7007LA	870	6.6	48		•			•	•	•	•	•	•		•	– low Anti-Oxidant package
Queo	8201	883	1.1	73	•		•		•	•							
Queo	8201LA	883	1.1	75	•		•										– low Anti-Oxidant package
Queo	8203	883	3	74	•		•	•	•			•				•	
Queo	8207LA	883	6.6	75	•	•	•	•		•	•	•				•	– low Anti-Oxidant package
Queo	8210	883	10	75		•	•				•	•	•	•	•	•	
Queo	8230	883	30	76		•				•	•	•	•	•	•	•	
Queo	0201	902	1.1	97	•			•	•								
Queo	0201FX	902	1.1	95	•												– slip & anti-block
Queo	0203	902	3	96	•			•	•	•						•	
Queo	0207LA	902	6.6	96	•	•		•	•	•	•	•					
Queo	0210	902	10	97	•	•		•	•		•	•	•	•	•	•	
Queo	0219	902	19	97		•					•	•					
Queo	0230	902	30	97		•					•	•	•	•		•	
Queo	1001	910	1.1	106	•										•		
Queo	1007	910	6.6	105	•							•			•		



---

**Borealis AG**

Wagramer Strasse 17–19 · AT-1220 Vienna · Austria

Tel. +43 1 22 400 300 · Fax +43 1 22 400 333

[www.borealisgroup.com](http://www.borealisgroup.com)

---



**BOREALIS**

بروج

**Borouge**

